


PM

Винты ступенчатые нержавеющие

Материал 35 NC 6 ±1100-1200 Н/мм²

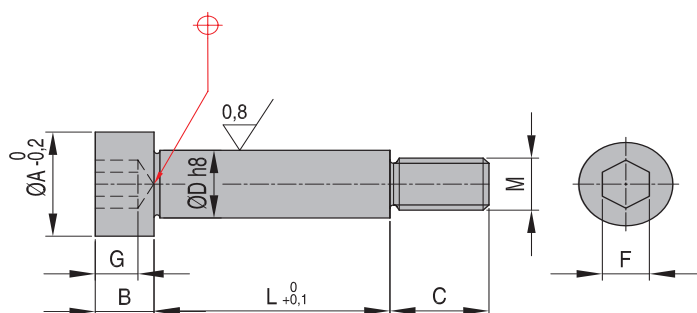

Пример заказа: (PM + M + L): PM506


M	L																							A	B	C	D	F	G	
	06	08	10	12	14	16	20	25	30	32	40	50	60	63	70	80	90	100	110	120	125	140	160							
5																									9	4	8	6	3	2,5
6																									11	5	10	8	4	3,0
8																									14	6	12	10	5	4,0

M																									A	B	C	D	F	G
	08	10	12	14	16	20	25	30	32	40	50	60	70	80	90	100	110	120	125	140	160	200	250							
10																									18	8	16	12	6	5,0
12																									22	10	20	16	8	6,0
16																									28	12	25	20	10	8,0
20																									36	16	32	25	14	11,0
24																									45	20	40	32	17	12,0

GM

Винт со скользящей посадкой

Материал: 1.7131
Твёрдость: ≈ 60HRC

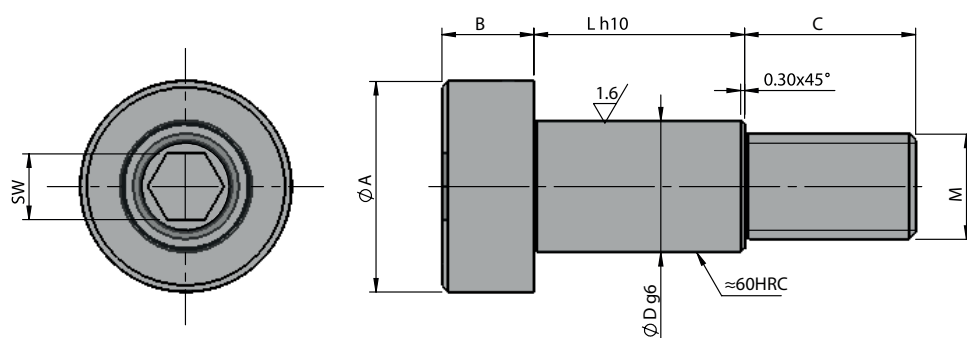

Пример заказа (GM + D + L): GM10016


D	L													C	M	B	A	SW
	016	020	025	030	040	050	060	070	080	090	100	120	140					
10														13	M8	7	16	5
12														16	M10	9	18	6
14														16	M10	9	21	6
18														18	M12	11	27	8

Винты ступенчатые

WZ412

Стандарт: DIN 267

Материал: Цементируемая сталь 12.9

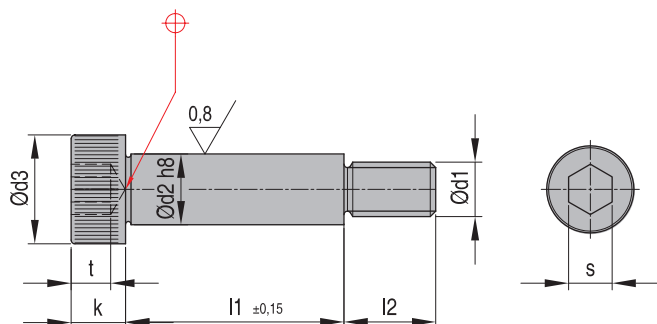

Пример заказа: (WZ412 + d2 + l1): WZ41206010

d2	l1													d1	d3	k	l2	S	tmin
	010	016	020	025	030	040	050	060	070	080	090	100	120						
06														M5	10	4,5	9,5	3	2,4
08														M6	13	5,5	11,0	4	3,3
10														M8	16	7,0	13,0	5	4,1
12														M10	18	9,0	16,0	6	4,9
16														M12	24	11,0	18,0	8	6,2
20														M16	30	14,0	22,0	10	8,8
24														M20	36	16,0	27,0	12	10

